
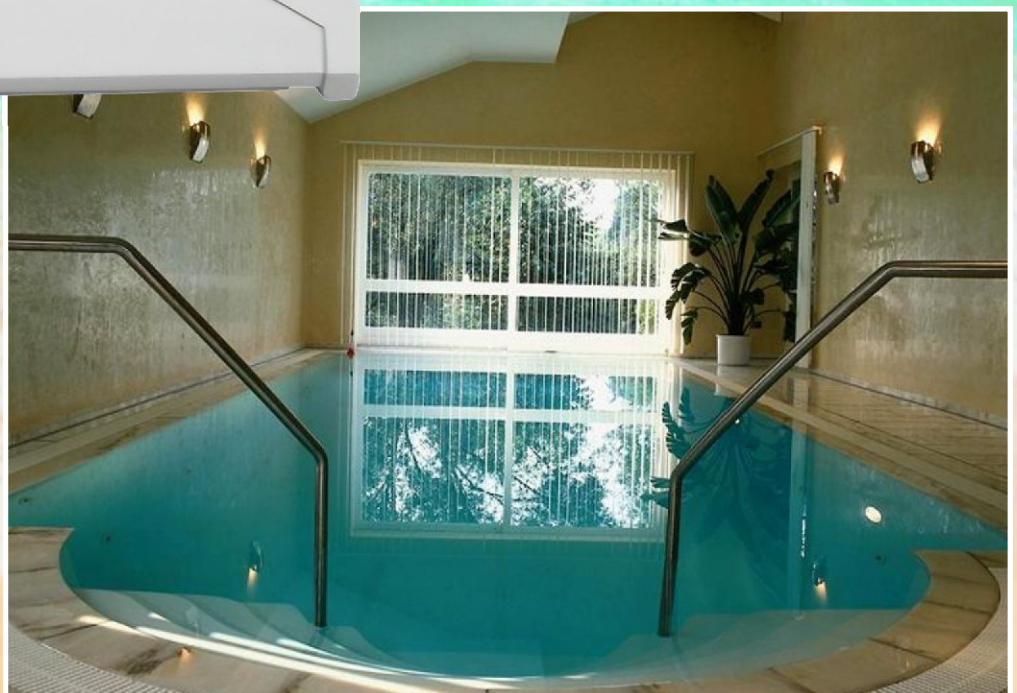


**WALL-MOUNTED SWIMMING POOL**

# DEHUMIDIFIER



DRY 300i AND 500i



**APPLICATIONS:** *indoor swimming pools, spa rooms, saunas, laundry rooms, driers, warehouses*


**ADVANTAGES:** *wireless remote control, warmwater heater, low noise, low consumption, colour variants RAL, instalation behind the wall is possible*

# BASIC TECHNICAL INFORMATION OF DEHUMIDIFIER

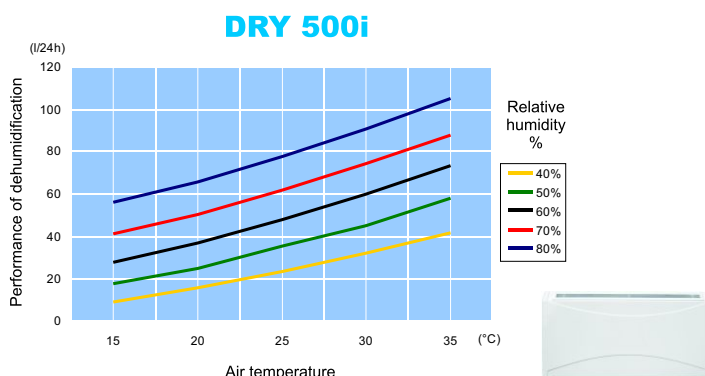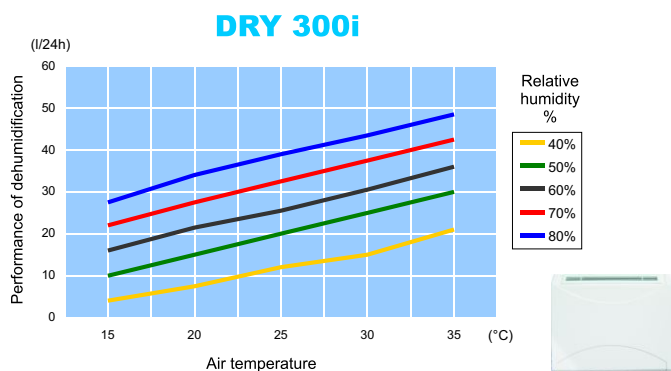


TECHNICAL DATA		DRY 300i	DRY 500i
Suitable for pools up to	m <sup>2</sup>	30	60
Performance 30 °C a 60 % Rh	l/24 h	30	60
Performance 30 °C a 70 % Rh	l/24 h	38	75
Performance 30 °C a 80 % Rh	l/24 h	43	92
Operating range - temperature	°C	15-35	15-35
Operating range - humidity	%	20-100	20-100
Air flow	m <sup>3</sup> /h	440	740
Noisines (in the distance of 1 m)	dB (A)	44	44
Total heat to air-dehumidifier	W	1900	3500
Power consumption	W	750	1200
Power supply	V/Hz/f	230/50/1	230/50/1
Nominal running	A	4,4	7,5
Protection	A	10	16
Wire	mm <sup>2</sup>	CYSY 3C x 1,5	CYSY 3C x 1,5
Condensate drain	Ø mm	16	16
Dimension (width x height x depth)	mm	780 x 653 x 255	1245 x 653 x 255
Package dimensions (width x height x depth)	mm	850 x 810 x 345	1315 x 810 x 345
Weight - net weight / gross weight	kg	40/46	60/69
ACCESSORIES			
Wireless remote control - with rotary wheel	yes/no	yes	yes
Total heat to air - warmwater heater (on boiler water 90/70°C)	W	2000	4000
Total heat to air - dehumidifier and warmwater heater	W	2900	5500

## Connections

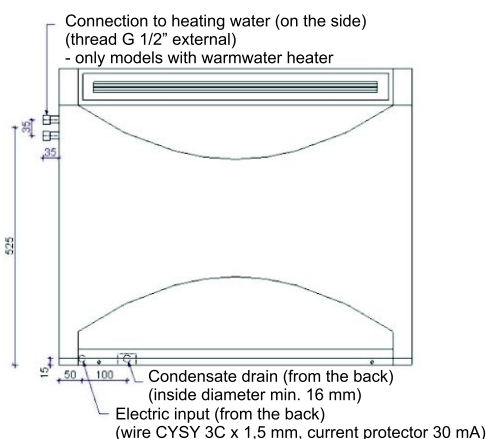

## Air Flow diagram

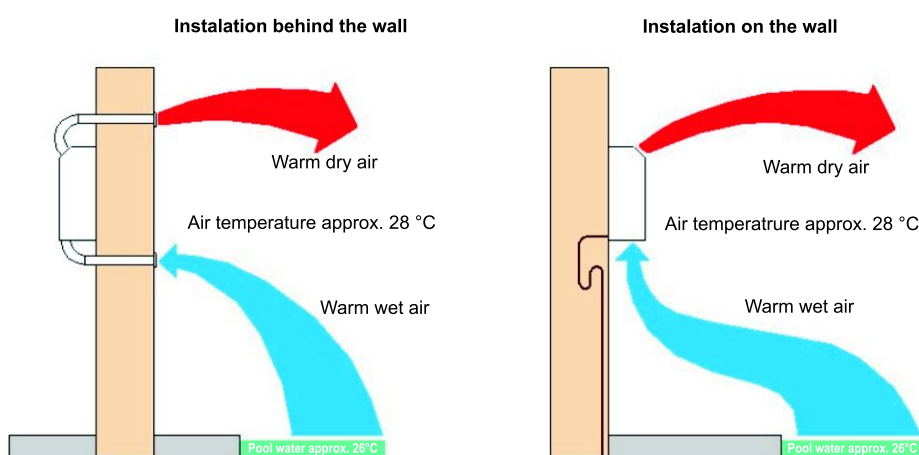

### Producer:

**MICROWELL** Ltd., SNP 2018/42, 927 01 Šaľa, Slovakia  
 Phone: +421-31-7020540, 7020541, fax: +421-31-7020542  
 e-mail: microwell@microwell.sk; www.microwell.sk

### Distributor: